


ARMERADE RÖR - GERMAX

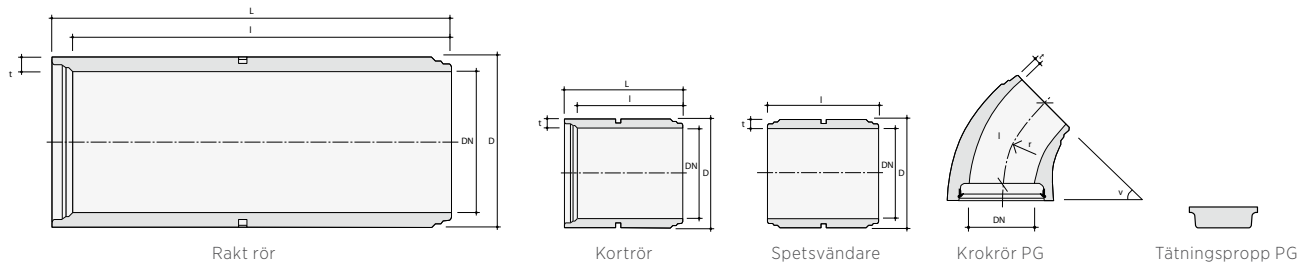

RAKT RÖR

Nom storlek DN mm	*Hållfasthets- klass	Rörgods t mm	Bygglängd l mm	Längd L mm	Utv diam D mm	Max vinkel ändring grader/mm per lm	Min & max spalt mm	kg/st	Area m ²	Produktnummer
400 PG	165	72	2200	2285	635	2,8°/48	4-24	640	0,126	820-042216
500 PG	165	82	2200	2285	700	2,3°/40	4-24	900	0,196	820-052216
600 PG	110	85	2200	2285	800	1,9°/33	4-24	1030	0,283	820-062211
600 PG	165	85	2200	2285	800	1,9°/33	4-25	1030	0,283	820-062216
600 PG m kul.a.lyft	110	85	2200	2285	800	1,9°/33	4-24	1030	0,283	820-0622111
600 PG m kul.a.lyft	165	85	2200	2285	800	1,9°/33	4-25	1030	0,283	820-0622161
800 PG	110	127	2200	2300	1054	1,7°/30	4-25	1930	0,503	820-082211
800 PG	165	127	2200	2300	1054	1,7°/30	4-25	1930	0,503	820-082216
1000 PG	110	128	2200	2300	1256	1,6°/28	5-25	2420	0,785	820-102211
1000 PG	165	128	2200	2300	1256	1,6°/28	5-25	2420	0,785	820-102216
1200 PG	110	135	2200	2300	1470	1,5°/26	5-35	3260	1,131	820-122211
1200 PG	165	135	2200	2300	1470	1,5°/26	5-35	3260	1,131	820-122216
1400 PG	110	157	2200	2300	1714	1,5°/26	5-35	4370	1,540	820-142211
1400 PG	165	157	2200	2300	1714	1,5°/26	5-35	4370	1,540	820-142216
1600 PG	110	172	1500	1620	1944	1,4°/24	5-35	3670	2,011	820-161511
1600 PG	165	172	1500	1620	1944	1,4°/24	5-35	3670	2,011	820-161516
1800 GF	110	192	1500	1620	2184	0,6°/11	7-20	4570	2,545	820-181511
1800 GF	165	192	1500	1620	2184	0,6°/11	7-20	4570	2,545	820-181516
2000 GF	110	207	1500	1620	2414	0,5°/9	7-25	5390	3,142	820-201511
2000 GF	165	207	1500	1620	2414	0,5°/9	7-25	5390	3,142	820-201516
2200 RF	110	215	1500	1620	2630	0,5°/9	7-25	6100	3,800	820-221511
2200 RF	165	215	1500	1620	2630	0,5°/9	7-25	6100	3,800	820-221516
2500 PG	110	280	1500	1675	3060	1,2°/20	8-74,5	9100	4,910	820-251511
2500 PG	165	280	1500	1675	3060	1,2°/20	8-74,5	9100	4,910	820-251516
2700 RF	110	230	1500	1625	3160	0,5°/9	12-25	8000	5,720	820-271511
2700 RF	165	230	1500	1625	3160	0,5°/9	12-25	8000	5,720	820-271516

*Går att få i andra hållfasthetsklasser

KORTRÖR

Nom storlek DN mm	Hållfasthets- klass	Rörgods t mm	Bygglängd l mm	Längd L mm	Utv diam D mm	kg/st	Produktnummer
400 PG	165	60	500	585	610	140	822-0405
400 PG	165	60	1000	1085	635	290	822-0410
500 PG	165	100	1000	1085	700	450	822-0510
600 PG	165	100	1000	1085	800	530	822-0610
800 PG	165	127	1000	1100	1054	825	822-0810
1000 PG	165	128	1000	1100	1256	1100	822-1010
1200 PG	165	135	1000	1100	1470	1490	822-1210
1400 PG	165	157	1000	1000	1714	1910	822-1410
1600 PG	165	172	750	870	1944	1750	822-1607
1800 GF	165	192	750	870	2184	2200	822-1807
2000 GF	165	207	750	870	2414	2625	822-2007

SPETSVÄNDARE

Nom.storlek DN mm	Hållfasthets- klass	Rörgods t mm	Bygglängd l mm	Utv diam D mm	kg/st	Produktnummer
400 PG	165	60	500	520	92	824-0405
500 PG	165	100	1000	700	405	824-0510
600 PG	165	100	1000	800	540	824-0610
800 PG	165	127	1000	1054	750	824-0810
1000 PG	165	128	1000	1256	1000	824-1010
1200 PG	165	135	1000	1470	1490	824-1210
1400 PG	165	157	1000	1714	1910	824-1410
1600 PG	165	172	750	1944	1910	824-1607
1800 GF	165	192	750	2184	2200	824-1807
2000 GF	165	207	750	2414	2650	824-2007

KROKRÖR PG

Nom storlek DN mmxv°	Hållfasthets- klass	Rörgods t mm	Bygglängd l mm	Radie r mm	kg/st	Produktnummer
500x5	165	95	210	700	95	826-0505
500x10	165	95	270	780	120	826-0510
500x15	165	95	330	700	150	826-0515
500x22,5	165	95	425	700	190	826-0522
600x5	165	95	220	780	120	826-0605
600x10	165	95	285	780	160	826-0610
600x15	165	95	355	780	190	826-0615
600x22,5	165	95	440	780	240	826-0622
800x5	165	120	205	1320	180	826-0805
800x10	165	120	320	1320	270	826-0810
800x15	165	120	435	1320	390	826-0815
800x22,5	165	120	610	1320	510	826-0822

TÄTNINGSPROPP PG

DN mm	kg/st	Produktnummer
800	170	827-0800
1000	280	827-1000

Övriga proppar på förfrågan

ARMERADE GENOMTRYCKNINGSRÖR GERMAX S

Nom storlek DN mm	Hållfasthets- klass	Rörgods t mm	Bygglängd l mm	Längd L mm	Utv. diameter D mm	Max vinkeländring		kg/st	Area m ²	Produktnummer
						grader	mm/m			
400 PG	240	91	1000	1085	582	2,8	48	360	0,13	823-9410
500 PG	240	100	1000	1085	700	2,3	40	450	0,20	823-9510
600 PG	165	100	1000	1085	800	1,9	33	530	0,28	823-9610
800	165	110	2000	2080	1020	1,2	21	1570	0,50	820-089816
1000	165	130	2000	2100	1260	1,3	22	2320	0,79	820-109816
1200	165	155	2000	2100	1510	0,8	14	3180	1,13	820-129816
1400	165	170	2000	2100	1740	0,7	12	4250	1,54	820-149816
1600	165	190	1250	1370	1980	0,7	12	3320	2,01	820-169816
1800	165	215	1250	1370	2230	0,6	10	4250	2,54	820-189816
2000	165	235	1250	1370	2470	0,5	9	5100	3,14	820-209816
2500 PG	165	280	1500	1675	3060	1,4	24	9100	4,91	820-259816